


Laser Physics-I (PHYC/ECE 464), Fall 2022

Homework #6, Due Monday Oct. 10


1- Drawn to scale on the graph below is the relative power transmission of a tunable light source at normal incidence through a Fabry-Perot etalon as the wavelength λ is varied. The etalon is made from of glass having index $n=1.515$ and thickness d with both sides mirrored with reflectivity R .

- a. What is d ?
- b. What is the *Finesse* , Q , and the reflectivity R ?
- c. Draw (on top of the above graph) the transmission for the case where R is purely due to the Fresnel reflectivities at normal incidence (i.e. no coating). What is the *finesse* and the *minimum transmission* in this case?

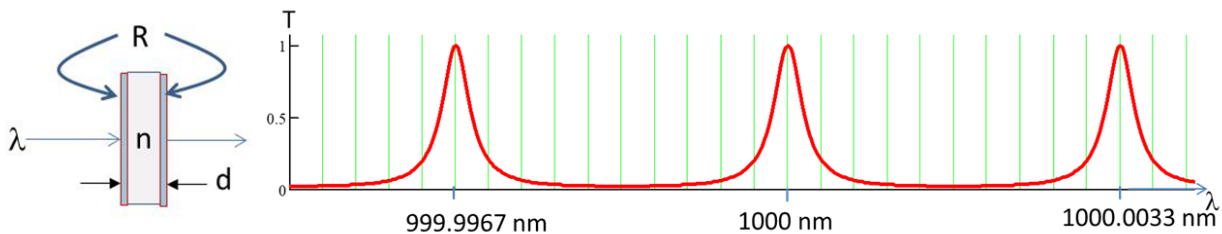

2. Problem 6.21 from Verdeyen:

Consider the accompanying diagram of a cavity designed to be utilized with a helium/neon laser at $\lambda_0 = 632.8$ nm.

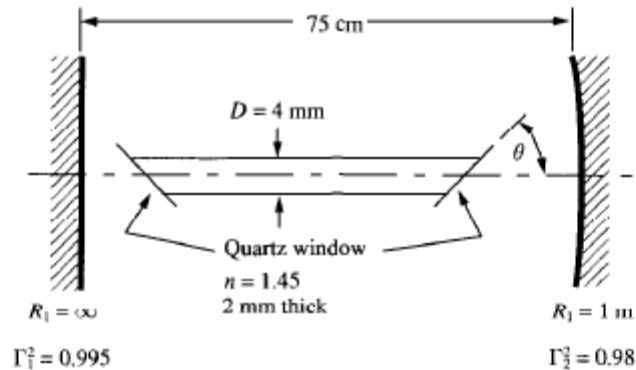

- (a) Is the cavity stable?
- (b) What is the spot size of the beam at the flat mirror?
- (c) What is the spot size of the beam at the spherical mirror?
- (d) The windows are cemented to the tube at Brewster's angle. What is the angle θ as shown on the sketch?
- (e) Assuming that the tube bore is centered with respect to the axis of the $TEM_{0,0}$ mode, compute the loss introduced by the aperturing action of the tube walls. (Zero is *not* an acceptable answer.)
- (f) What is the formula for the resonant frequency of the $TEM_{m,p,q}$ mode?

3. Problem 6.22 from Verdeyen:

Consider a single $\text{TEM}_{0,0,q}$ mode of the laser shown in Problem 6.21. Because of room vibrations, sound waves, and temperature variations, the distance $d = 75$ cm varies slightly about its nominal value. If the optical frequency of a mode is to be held constant to 1 kHz, what is the maximum allowable variation in d ? The answer should disturb you, especially when you consider that atoms are *spaced* about 4 \AA apart. Nevertheless, such frequency control is possible.